


## Top View

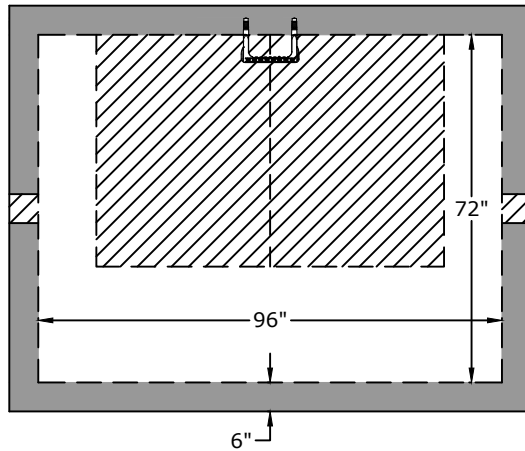


## Notes


Lid weight - 10,100 lb  
Body weight - 28,000 lb

## Joint Detail

Positive Lock Male/Female Keyway  
+- 0.005" tolerance



## Side View

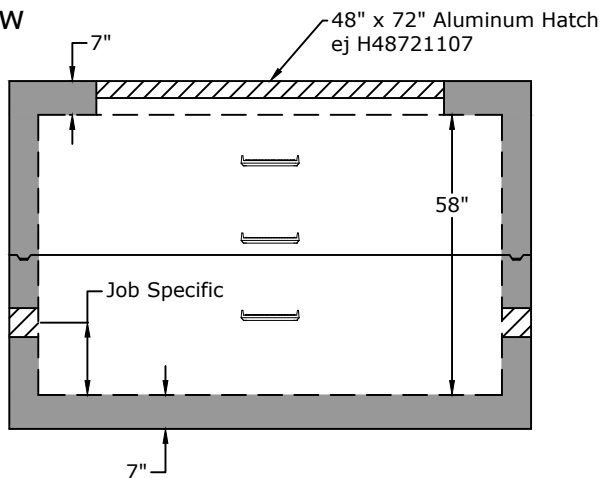

## Approved for Production

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Quantity: \_\_\_\_\_

By: \_\_\_\_\_

Drawn by: Eric Barger

Date: 7.102024

# BARGER PRECAST

P.O. Box 370 - Kingston TN 37763  
Phone 888.882.5860 - BargerPrecast.com

**Concrete:** 5,000 psi minimum strength (28 day)

**Reinforcing:** Primary reinforcement will be rebar (Grade 60) rebar.

**Pipe Penetrations:** All pipe penetrations are placed according to job requirements.

**Sealant:** Sealant used will meet or exceed ASTM C990.

**Steps:** If required, will be aligned under the hatch unless specified.

**General:** Meter vaults are not water tight structures unless specified by Barger Precast.

**Tank Warranty:** See Terms and Conditions.

**8' x 6' x 58" Vault w/ Offset Hatch**