




Top View

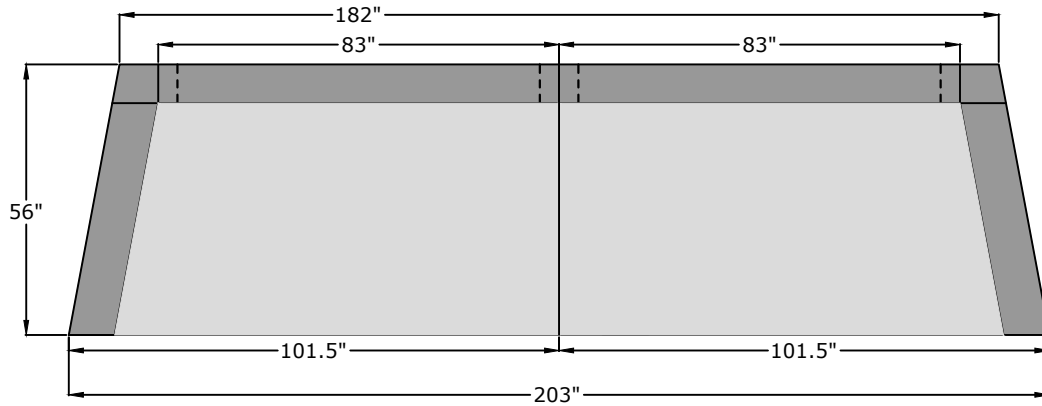

Toe Detail - added upon request

Front View

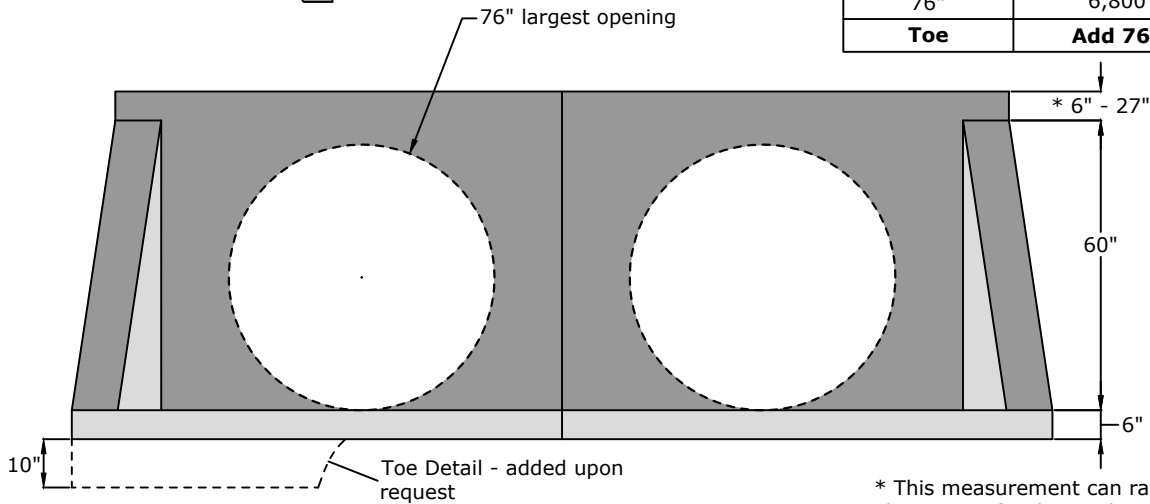

Hole Dia. (in.)	Half Weight (lb.)	Total Weight (lb.)
No Hole	9,800	19,600
56"	8,200	16,400
62"	7,800	15,600
66"	7,500	15,000
70"	7,300	14,600
76"	6,800	13,600
Toe	Add 761	Add 1,522

* This measurement can range from 6" to 27". Please specify when ordering.

Add 70 lb. per inch for headwall top extensions over the default 6" height.

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Drawn by: Eric Barger

Date: 8.072024

Specifications

Concrete: 5,000 psi minimum strength (28 day)
Reinforcement: #3 rebar (Grade 60) or 0.12 in² WWF
Energy Dissipaters: Added upon request (12"L x 6"W x 12"H)
Toe: Added upon request

**BARGER
PRECAST**

P.O. Box 370 - Kingston TN 37763
 Phone 888.882.5860 - BargerPrecast.com

Double Headwall - Large