


Top View


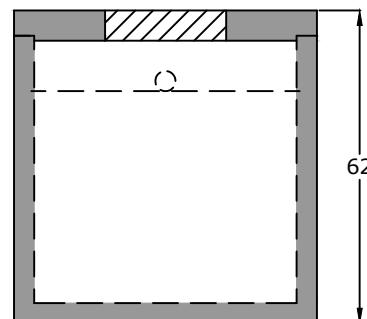


End View


**Notes:**

ASTM C 1613 Compliant  
4" Inlet/Outlet (Standard)  
6" PVC 90 in Baffle Wall  
2/3 - 1/3 Compartment Capacity

Butyl Sealant:  
ASTM-C-990 Compliant

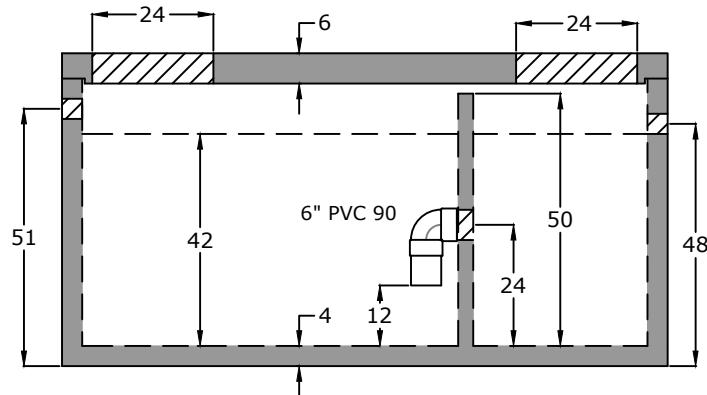

Side View



Baffle View

**Specifications**

**Concrete:** 5,000 psi minimum strength (28 day)  
**Reinforcing:** Primary reinforcement will be rebar.  
**Risers:** Grade rings and manhole frames and covers sold separately.  
**Sealant:** Sealant used in the seam will meet or exceed ASTM C990.  
**Pipe Penetrations:** Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.  
**Partition Wall:** The partition wall, if present, is poured monolithically.  
**Drawing:** All measurements are accurate within  $\pm 1$  inch.

**Tank Warranty:** See Terms and Conditions.

**Centroid(s):** Lid (60, 30), Base (61, 30)

# BARGER PRECAST

P.O. Box 370 - Kingston TN 37763  
Phone 888.882.5860 - BargerPrecast.com

**Weights**  
Top - 3,117 lb  
Bottom - 9,526 lb  
**Anti-Float Protection**  
17" of water

**Installation:** The tank hole is not to be more than 18 in. longer and wider than the tank. There shall be a minimum of 6" of 3/4" stone bedding. Do not install across path of vehicles or heavy equipment. This tank is designed for one hundred fifty pounds per square foot (150 lb/ft<sup>2</sup>) uniform loading on the top of the tank with a max backfill cover of 36" and a minimum of 6".

**1,000 Gallon Grease Trap**  
**Clarksville Wastewater Dept - Clarksville, TN**

Date: 9.27.2016 Drawn By: Eric Barger Updated: 7.26.2024