

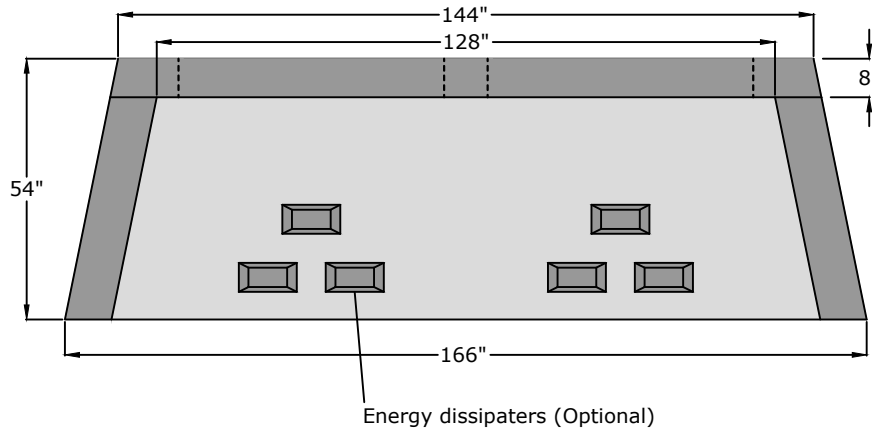


Top View



Height (in.)	Half Weight (lb.)	Total Weight (lb.)
No Hole	6,188	12,376
34"	5,566	11,132
38"	5,411	10,822
44"	5,146	10,292
50"	4,843	9,686
55"	4,560	9,120
Toe	632	1,264

Front View

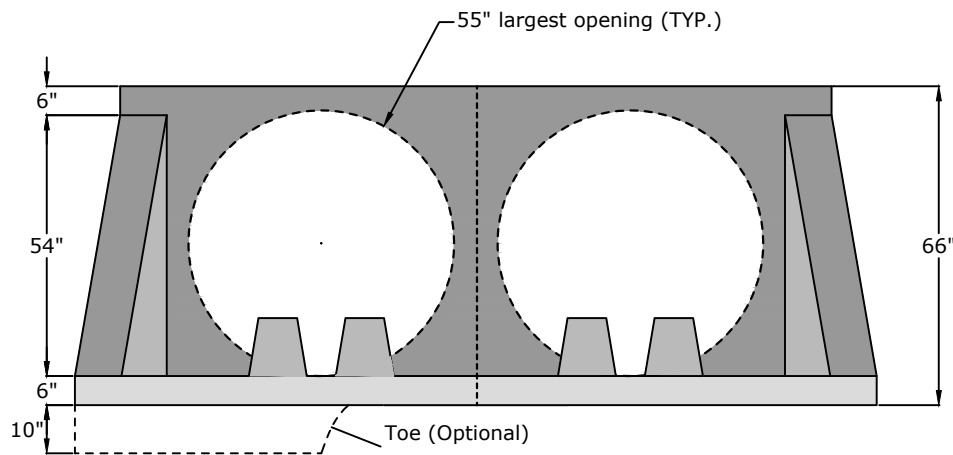

Toe Detail (Optional)

PIPE SIZE:	
HOLE SIZE:	
Toe:	Yes No

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Drawn by: RFB

Date: 8.062024

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Reinforcement: #3 rebar (Grade 60) or 0.12 in² WWF

Energy Dissipaters: Added upon request (12"L x 6"W x 12"H)

Toe: Added upon request

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

Double Headwall - Medium