

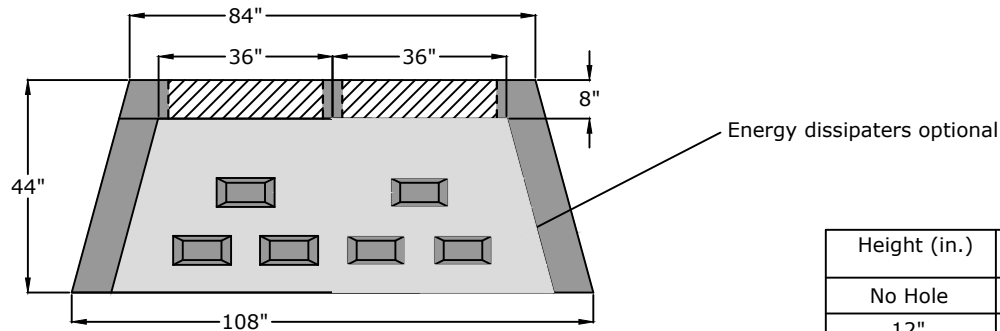


Top View



Height (in.)	Half Weight (lb.)	Total Weight (lb.)
No Hole	2,770	5,540
12"	2,693	5,385
16"	2,632	5,264
18"	2,596	5,192
20"	2,555	5,110
22"	2,510	5,020
26"	2,406	4,812
30"	2,286	4,572
32"	2,219	4,438
Toe	Add 320	Add 640

Front View

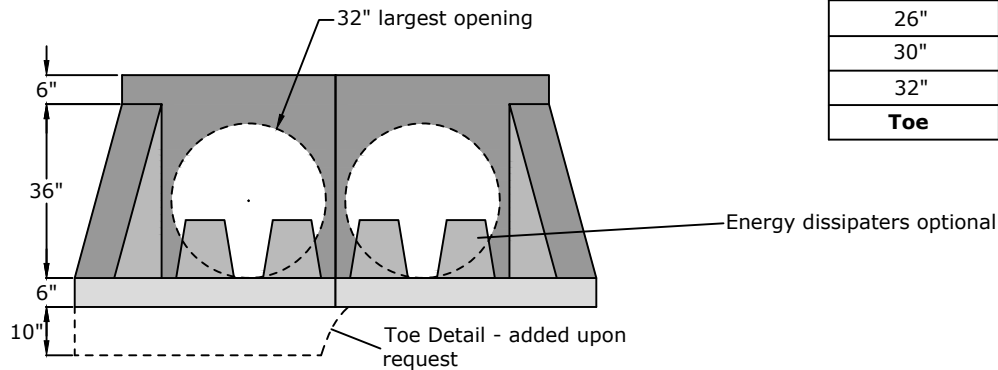

Toe Detail - added upon request

PIPE SIZE:	
HOLE SIZE:	
Toe:	Yes No

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Drawn by: RFB

Date: 8.062024

Specifications

Concrete: 4,000 psi minimum strength (28 day)
Reinforcement: #3 rebar (Grade 60) or 0.12 in² WWF
Energy Dissipaters: Added upon request (12"L x 6"W x 12"H)
Toe: Added upon request

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
 Phone 888.882.5860 - BargerPrecast.com

Double Headwall - Small