



Top View

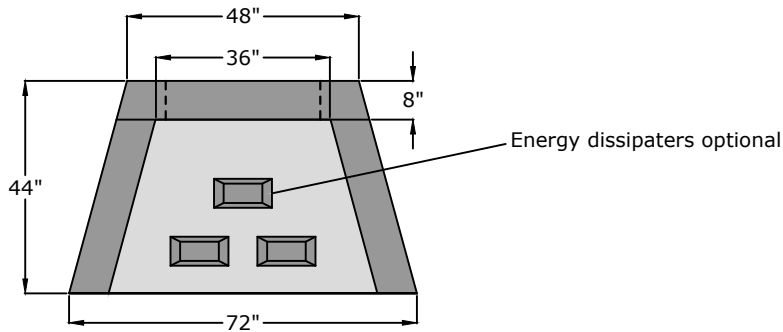

Front View

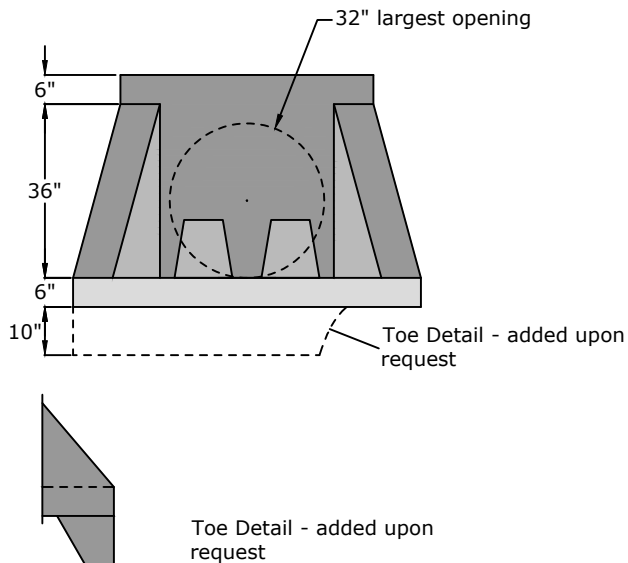

Height (in.)	Weight (lb.)
No Hole	3,689
12"	3,612
16"	3,551
18"	3,514
20"	3,474
22"	3,429
26"	3,325
30"	3,205
32"	3,138
Toe	Add 523

PIPE SIZE:	
HOLE SIZE:	
Toe:	Yes No

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Drawn by: Eric Barger

Date: 8.062024

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Reinforcement: #3 rebar (Grade 60) or 0.12 in² WWF

Energy Dissipaters: Added upon request (12"L x 6"W x 12"H)

Toe: Added upon request

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

Headwall Small