



Top View

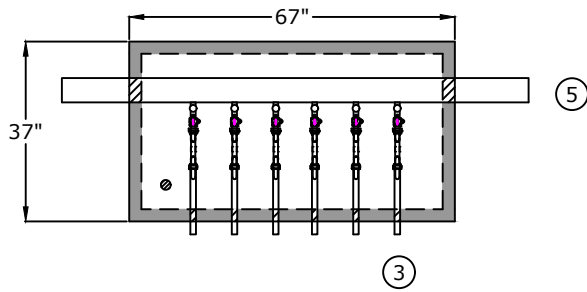


1. Meter Yoke
A.Y. McDonald
770-2--WDMD 33
2. Corporation Stop
A.Y. McDonald
3/4" CC x FNPT 74101BCAPF
3. 3/4" x 24" Brass nipple
4. 29" x 59" opening single leaf
aluminum door, pedestrian rated (300
lb/ft²) S1R029059CD
5. 4" Class 56 D.I.P.
6. 2" drain hole


Side View

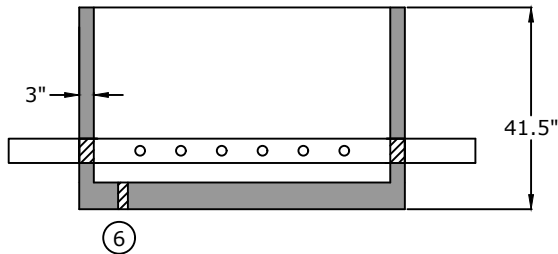


End View



Component Detail

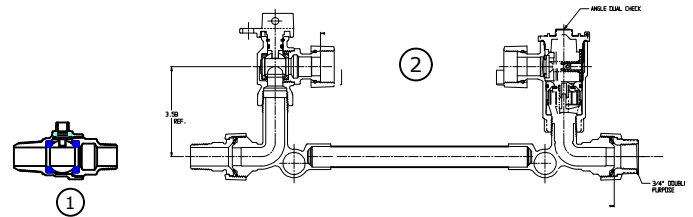

Pipe detail for taps



Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

BARGER PRECAST

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Pipe Penetrations: All pipe penetrations are placed according to job requirements.

6-Gang 3/4" Meter Vault City of Franklin

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

Date: 10.022024

Drawn By: Samantha Lowe

Approx. Vault Weight: 3,100 lbs.