


Top View


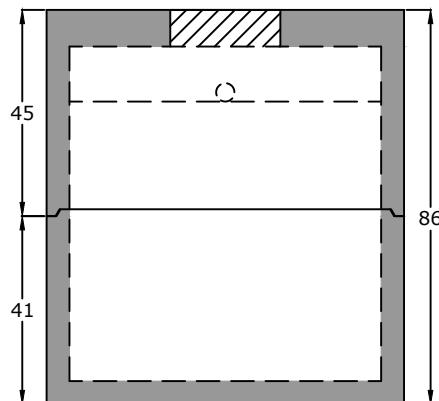


End View


Notes:

ASTM C 1613 compliant
 HS20 Traffic Rated
 4" Inlet/Outlet (W/ Two Way Cleanout TEE)
 6" PVC 90 in Baffle Wall
 2/3 - 1/3 Compartment Capacity
 Inlet/Outlet TEE's Provided By Customer

ASTM C 990 Butyl Sealant

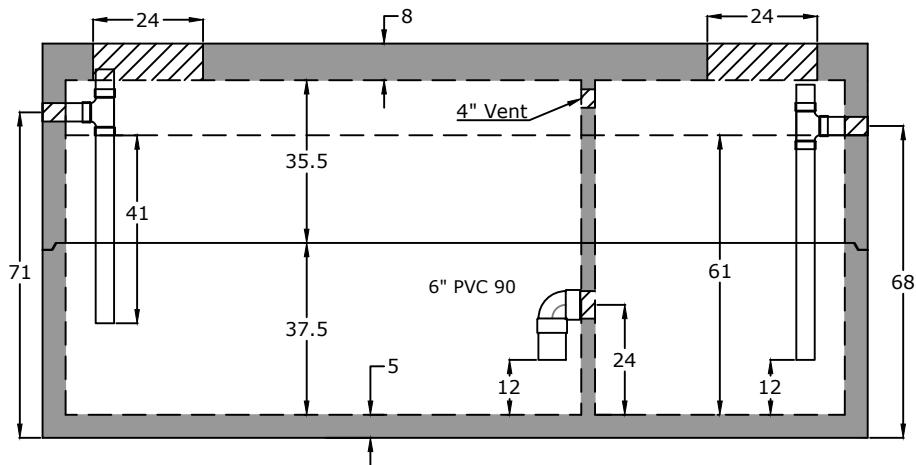

Side View

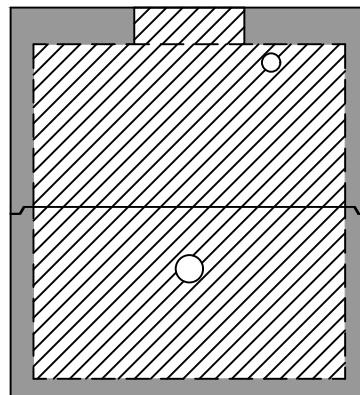

Baffle View

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Reinforcing: Primary reinforcement will be rebar.

Risers: Grade rings and manhole frames and covers sold separately.

Sealant: Sealant used in the seam of the tank will meet or exceed ASTM C990.

Pipe Penetrations: Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.

Partition Wall: The partition wall, if present, is poured monolithically.

Drawing: All measurements are accurate within ± 1 inch.

Tank Warranty: See Terms and Conditions.

Centroid(s): Lid (91, 39), Base (91, 39)

BARGER
PRECAST

Weights

Top - 17,161 lb
 Bottom - 14,633 lb

Anti-Floot Protection
 29" of water

Installation: The tank hole is not to be more than 18" longer and wider than the tank. There shall be a minimum of 6" of 3/4" stone bedding. This tank is designed for HS20 traffic loads and with a max backfill cover of 36" and a minimum of 6".

3,000 Gallon HS20 Grease Trap
City of Franklin

P.O. Box 370 - Kingston TN 37763
 Phone 888.882.5860 - BargerPrecast.com

Date: 8.202018 Drawn By: Eric Barger Updated: 7.262024