



### Top View

## Notes

Lid weight - 14,600 lb  
Body weight - 9,100 lb

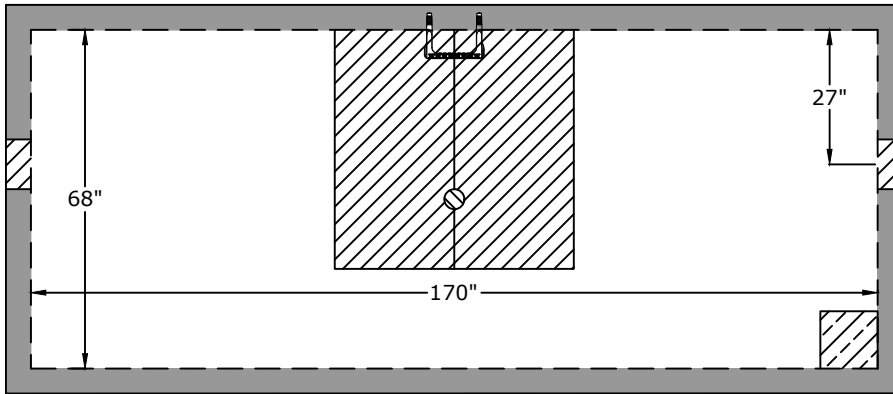

### Side View

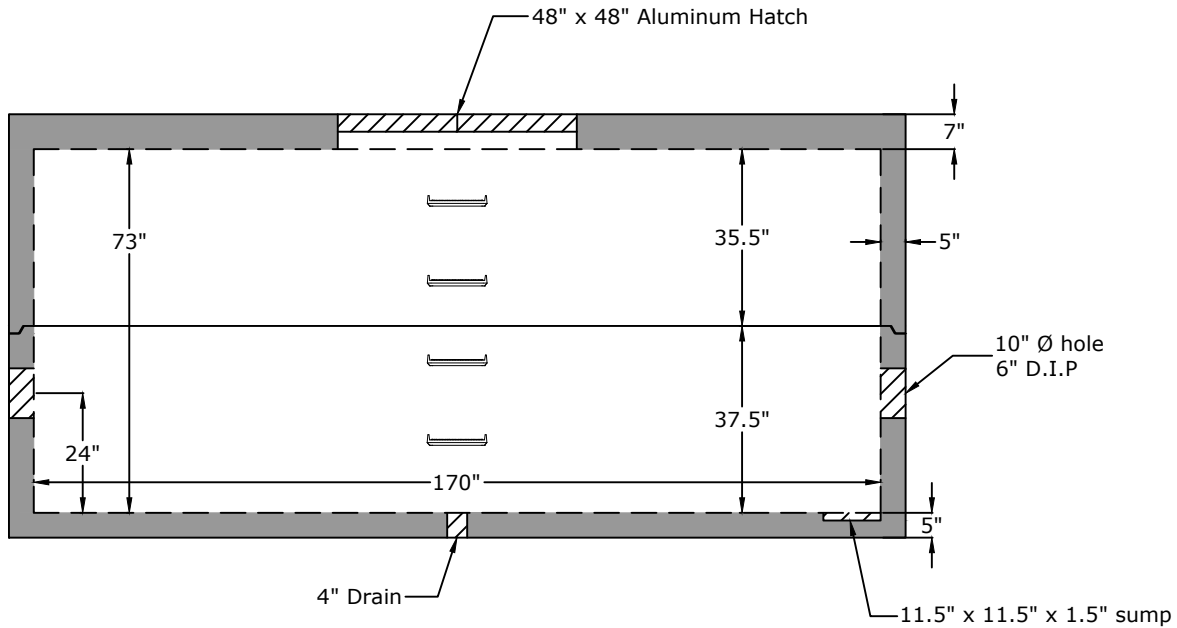

**Approved for Production**

**Project:**

**Date:** \_\_\_\_\_

**Quantity:** \_\_\_\_\_

**By:** \_\_\_\_\_

**Drawn by:** Samantha Lowe

**Date:** 10.212024

**Concrete:** 5,000 psi minimum strength (28 day)

**Reinforcing:** Primary reinforcement will be rebar (Grade 60) rebar.

**Pipe Penetrations:** All pipe penetrations are placed according to job requirements.

**Sealant:** Sealant used will meet or exceed ASTM C990.

**Steps:** If required, will be aligned under the hatch unless specified.

**General:** Meter vaults are not water tight structures unless specified by Barger Precast.

**Tank Warranty:** See Terms and Conditions.

# BARGER PRECAST

P.O. Box 370 - Kingston TN 37763  
Phone 888.882.5860 - BarqerPrecast.com

**170" x 68" x 73" - 6" Fire Line Vault w/ Bypass  
City of LaVergne**