



Top View

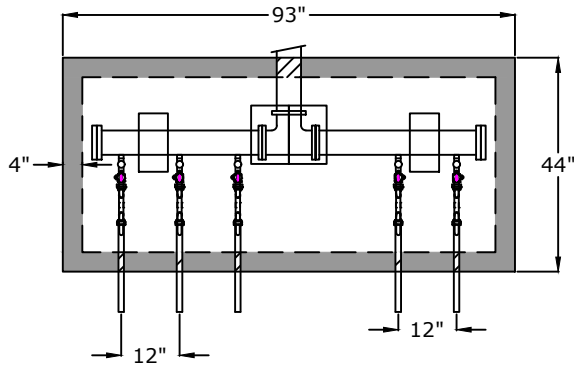


1. (1) 3" Flg x PE 3'-0" spool piece
2. (5) Flange kits
3. (1) 3" Flange tee
4. (1) 3" Flg x Flg 2'-10" with three $\frac{3}{4}$ " CC taps
5. (1) 3" Flg x Flg 2'-10" with two $\frac{3}{4}$ " CC taps
6. (2) 3" Blind flange
7. (5) 3" x $\frac{3}{4}$ " NPT $\frac{3417}{3413}$ saddle OD range 3.45 - 4.05
8. (5) $\frac{3}{4}$ " x 4" brass nipple
9. (5) AYM34583476101MW $\frac{3}{4}$ x $\frac{5}{8}$ x $\frac{3}{4}$ ball valve FIP x MSN
10. (5) $\frac{3}{4}$ " meter idler
11. (5) $\frac{5}{8}$ " x $\frac{3}{4}$ " meter + MXu provided by Metro
12. (5) AYM34583476110MWQ $\frac{3}{4}$ x $\frac{5}{8}$ x $\frac{3}{4}$ ball valve QJC x MSN
13. (1) Halliday S1K3584CBD 35" x 84" S1K F+C 316SS


Side View

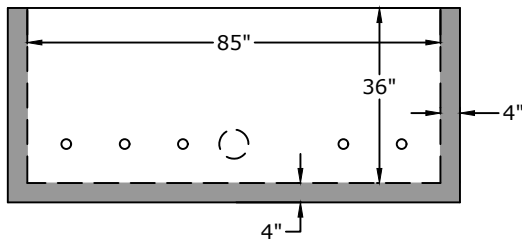

End View



Pipe detail for taps



Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

BARGER

PRECAST

C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerAndSons.com

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Pipe Penetrations: All pipe penetrations are placed according to job requirements.

Pipe Stands: Adjustable height pipe stands can be provided to support assembly.

Sealant: Sealant used will meet or exceed ASTM C990.

85" x 36" x 36"
5 Gang Meter Vault - Nashville Metro

Date: 2.122025

Drawn By: Samantha Lowe

Approx. Vault Weight: 4,600 lbs.