


Top View

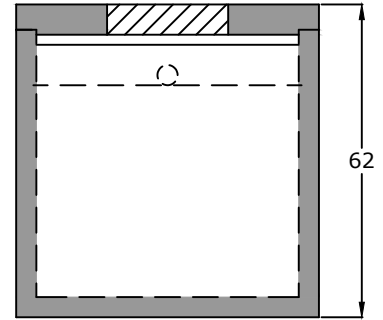


End View

Notes:


ASTM C 1613 Compliant
 4" Inlet/Outlet (Standard)
 Three 4" Holes in Baffle Wall
 2/3 - 1/3 Compartment Capacity

Stencil


[Date of manufacture]
 1000 Gallons
 150 lb/sq ft
 3' of cover
 [Inlet/Outlet Size]
 "Inlet" and "Outlet"



Butyl Sealant:
 ASTM-C-990 Compliant

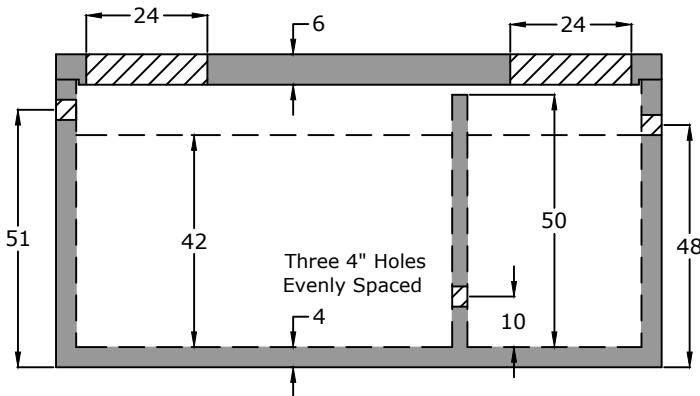

Side View



Baffle View

Specifications

Concrete: 5,000 psi minimum strength (28 day)
Reinforcing: Primary reinforcement will be rebar.
Risers: Grade rings and manhole frames and covers sold separately.
Sealant: Sealant used in the seam of the tank will meet or exceed ASTM C990.
Pipe Penetrations: Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.
Partition Wall: The partition wall, if present, is poured monolithically.
Drawing: All measurements are accurate within ± 1 inch.

Tank Warranty: See Terms and Conditions.

Centroid(s): Lid (60, 30), Base (61, 30)

BARGER
PRECAST

Weights

Top - 3,117 lb
 Bottom - 9,526 lb

Anti-Float Protection

17" of water

Installation: The tank hole is not to be more than 18 in. longer and wider than the tank. There shall be a minimum of 6" of 3/4" stone bedding. Do not install across path of vehicles or heavy equipment. This tank is designed for one hundred fifty pounds per square foot (150 lb/ft²) uniform loading on the top of the tank with a max backfill cover of 36" and a minimum of 6".

P.O. Box 370 - Kingston TN 37763
 Phone 888.882.5860 - BargerPrecast.com

1,000 Gallon Grease Trap
Hamilton County WWTa - Hamilton County, TN

Date: 12.212012

Drawn By: Eric Barger

Updated: 7.222024