


# Top View

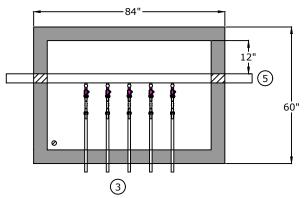

### Side View

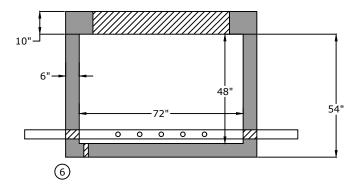

**End View** 




1. Meter Yoke


A.Y. McDonald 720-412-JMMD 44 Full port ball valve Full port angled dual check AYM  $\frac{5}{8}$ " x 1" 710J14KIT

- 2. Corporation Stop A.Y. McDonald 7410BCAPF
- 3. 1" Brass nipple
- 4. 30" x 60" opening traffic rated aluminum hatch H1W6030
- 5. 4" Class 56 D.I.P.
- 6, 2" drain hole

#### Component Detail



## Pipe detail for taps



#### **Approved for Production**

Project:	Date:
Quantity:	Ву:

Drawn by: Samantha Lowe

Date: 10.172024

Concrete: 5,000 psi minimum strength (28 day)

Reinforcing: Primary reinforcement will be rebar (Grade 60) rebar.

Pipe Penetrations: All pipe penetrations are placed according to job requirements.

Sealant: Sealant used will meet or exceed ASTM C990.

Steps: If required, will be aligned under the hatch unless specified.

General: Meter vaults are not water tight structures unless specified by Barger Precast.

Tank Warranty: See Terms and Conditions.

6' x 4' x 4' - HS20 - 5 Gang 1" Meter Vault **MWSD** 

P.O. Box 370 - Kingston TN 37763 Phone 888.882.5860 - BargerPrecast.com

PRECAST