



## Top View

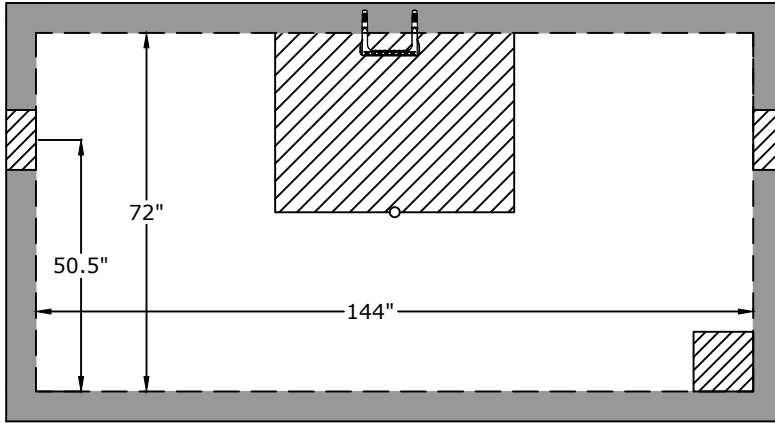

## Notes

Top Weight - 7,000 lb  
Bottom Weight- 23,700 lb

## Side View

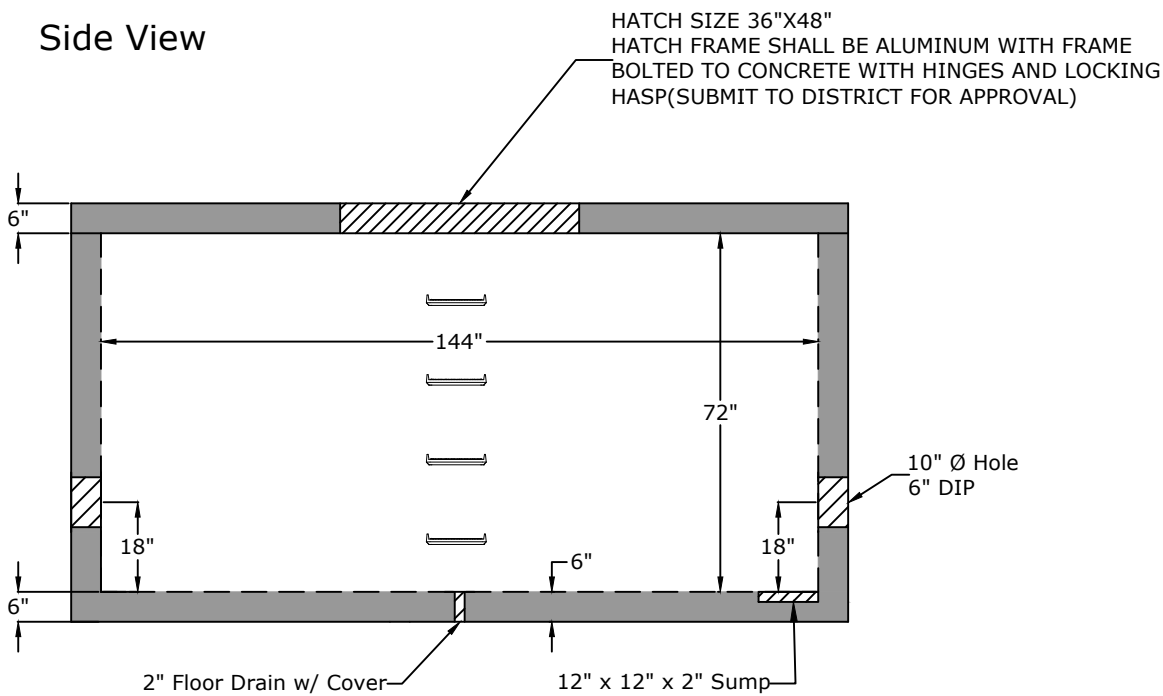

## Approved for Production

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Quantity: \_\_\_\_\_

By: \_\_\_\_\_

# BARGER PRECAST

C.R. Barger & Sons, Inc.  
P.O. Box 370 - Kingston TN 37763  
Phone 888.882.5860 - BargerAndSons.com

### Specifications

**Concrete:** 5,000 psi minimum strength (28 day)

**Reinforcing:** Primary reinforcement will be a #3 rebar (Grade 60) rebar.

**Pipe Penetrations:** All pipe penetrations are placed according to job requirements.

**Sealant:** Sealant used will meet or exceed ASTM C990.

**Steps:** If required, the steps will be aligned under hatch unless specified.

**144" x 72" x 72"**  
**WWUD 6" Fire Water Meter**

Date: 2.142025

Drawn By: Samantha Lowe