




Top View

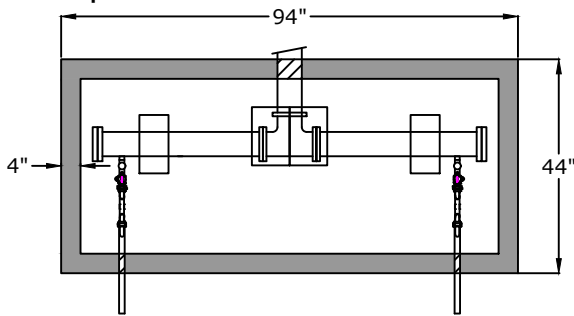

Side View

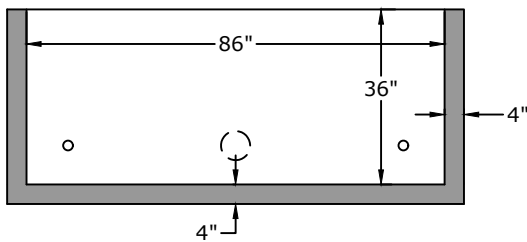


End View



1. (1) 3" Flg x PE 3'-0" spool piece
2. (5) Flange kits
3. (1) 3" Flange tee
4. (1) 3" Flg x Flg 2'-10" with one $\frac{3}{4}$ " CC taps
5. (1) 3" Flg x Flg 2'-10" with two $\frac{3}{4}$ " CC taps
6. (2) 3" Blind flange
7. (2) 3" x $\frac{3}{4}$ " NPT $\frac{3417}{3413}$ saddle OD range 3.45 - 4.05
8. (2) $\frac{3}{4}$ " x 4" brass nipple
9. (2) AYM34583476101MW $\frac{3}{4}$ x $\frac{5}{8}$ x $\frac{3}{4}$ ball valve FIP x MSN
10. (2) $\frac{3}{4}$ " meter idler
11. (2) $\frac{5}{8}$ " x $\frac{3}{4}$ " meter + MXu provided by Metro
12. (2) AYM34583476110MWQ $\frac{3}{4}$ x $\frac{5}{8}$ x $\frac{3}{4}$ ball valve QJC x MSN
13. (1) Halliday S1K3584CBD 35" x 84" S1K F+C 316SS

Pipe detail for taps



Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

BARGER

PRECAST

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Pipe Penetrations: All pipe penetrations are placed according to job requirements.

Pipe Stands: Adjustable height pipe stands can be provided to support assembly.

Sealant: Sealant used will meet or exceed ASTM C990.

C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerAndSons.com

36" W x 86" L x 36" T
2 Gang Meter Vault - Nashville Metro

Date: 8.042026

Drawn By: Scott Lee

Approx. Vault Weight: 4,600 lbs.