



Top View

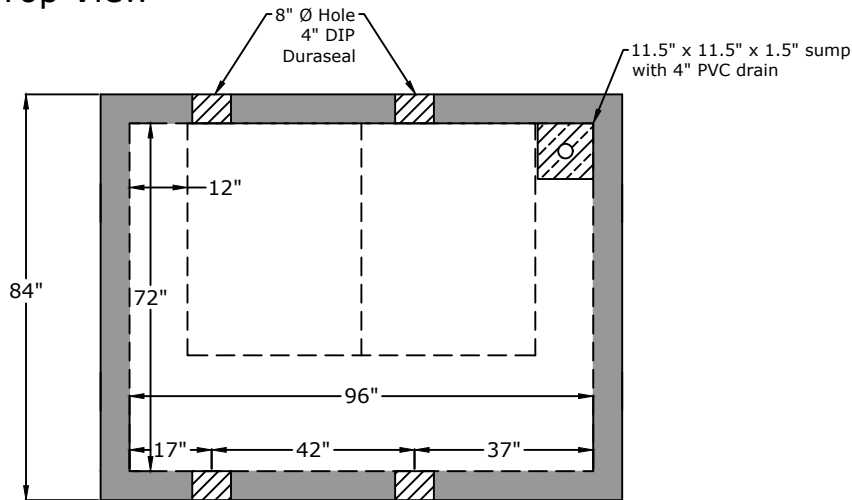

Notes


Top weight - 11,000 lb
 Bottom weight (empty) - 13,500 lb
 48" x 72" aluminum hatch
 NO STEPS

Side View

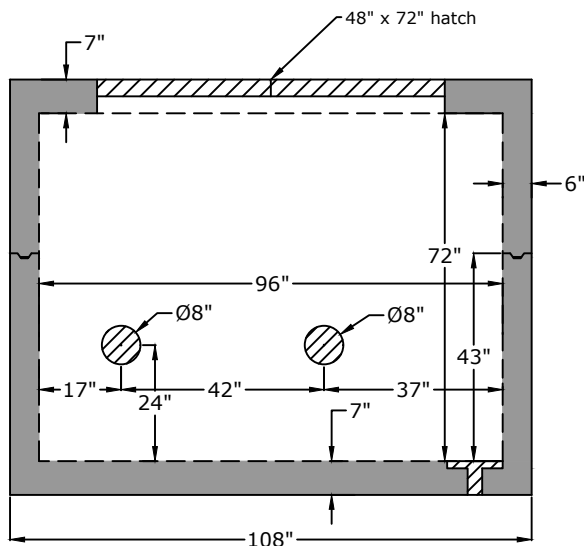

Joint Detail

Positive Lock Male/Female Keyway
 +- 0.005" tolerance



Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

BARGER

PRECAST

C.R. Barger & Sons, Inc.
 P.O. Box 370 - Kingston TN 37763
 Phone 888.882.5860 - BargerAndSons.com

Specifications

Concrete: 5,000 psi minimum strength (28 day)
Reinforcing: Primary reinforcement will be a #3 rebar (Grade 60) rebar.
Pipe Penetrations: All pipe penetrations are placed according to job requirements.
Pipe Stands: Adjustable height pipe stands may be provided to support assembly.
Sealant: Sealant used will meet or exceed ASTM C990.
Steps: Aligned under hatch unless specified.
General: Meter vaults are not water tight structures unless specified by Barger And Sons.

8' L x 6' W x 72" T - 4" Fire & Domestic Vault
City of LaVergne

Date: 4.042022

Drawn By: Eric Barger

Updated: 11.132023