


Top View

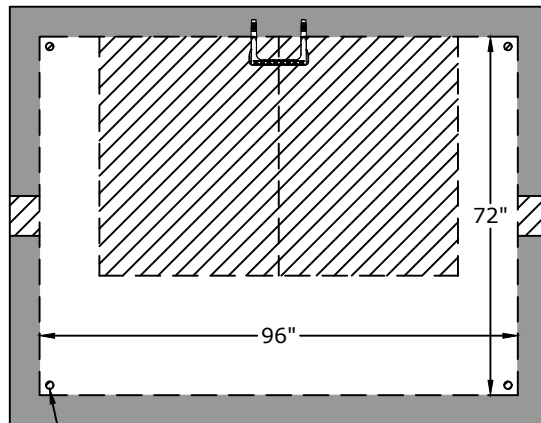


1.5" Diameter drain hole in every corner

Notes

Lid weight - 8,800 lb
Body weight - 10,9700 lb

Side View

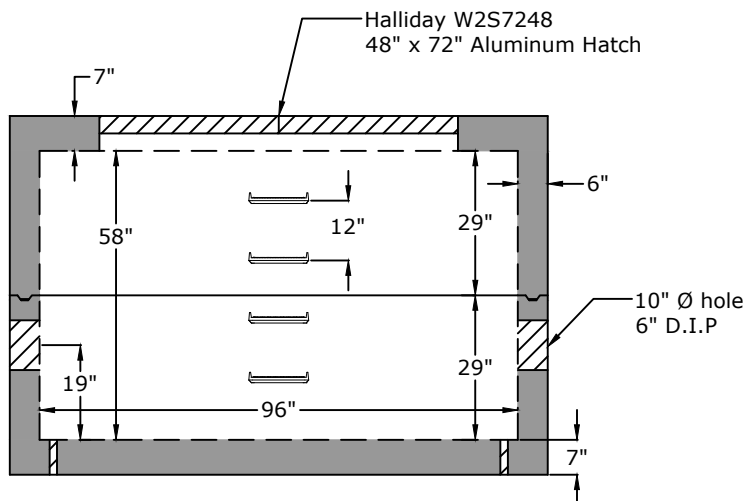

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Drawn by: Samantha Lowe

Date: 10.222024

Concrete: 5,000 psi minimum strength (28 day)

Reinforcing: Primary reinforcement will be rebar (Grade 60) rebar.

Pipe Penetrations: All pipe penetrations are placed according to job requirements.

Sealant: Sealant used will meet or exceed ASTM C990.

Steps: If required, will be aligned under the hatch unless specified.

General: Meter vaults are not water tight structures unless specified by Barger Precast.

Tank Warranty: See Terms and Conditions.

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

8' x 6' x 58" - 6" Compound Meter Vault
Mallory Valley Utility District