


Top View

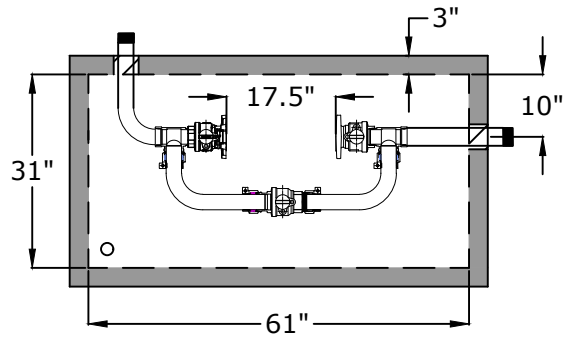


Notes


Weight: 3,500 lb

1. (2) 2" x 24" Brass Nipple
2. (1) 2" A.Y. McDonald No-Rise Setter No Lead 720R700KWFF 777X436
Alternate Ford Meter Setter:
2" Ford No-Rise Setter No Lead
VBB77-00B-11-77-EXP-NL
3. (2) 2" Oval Meter Gasket 2-bolt
4. (4) $\frac{5}{8}$ " Hex Bolts & Nuts Zinc Coated or Stainless Steel
5. (1) 29" x 59" Opening Single Leaf Aluminum Hatch Pedestrian Rated (300lb/ft²) S1R029059C-D-D----
W/SS Slam Lock W/Key, Spring Assist, EPDM Gasket Cushion, Embed Flange Removed
6. 2" Drain Hole
7. City of Lebanon to Provide 2" Disc Meter 17" Length
8. (3) 2" Stainless Steel Pipe Stands

Side View

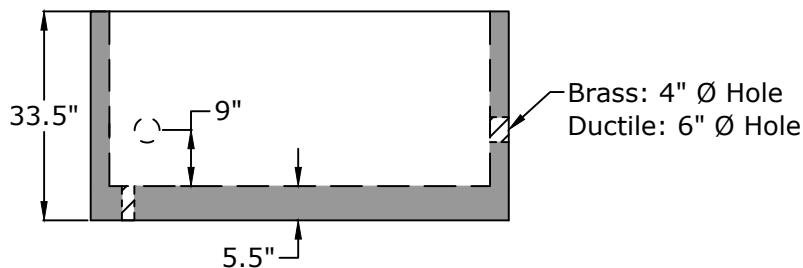

End View



Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Drawn by: Scott Lee

Date: 9.182026

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

Concrete: 5,000 psi minimum strength (28 day)
Reinforcing: Primary reinforcement will be rebar (Grade 60) rebar.
Pipe Penetrations: All pipe penetrations are placed according to job requirements.
Sealant: Sealant used will meet or exceed ASTM C990.
Steps: If required, will be aligned under the hatch unless specified.
General: Meter vaults are not water tight structures unless specified by Barger Precast.

Tank Warranty: See Terms and Conditions.

2" Meter with Bypass & 90 Through Side City of Lebanon