## Top View

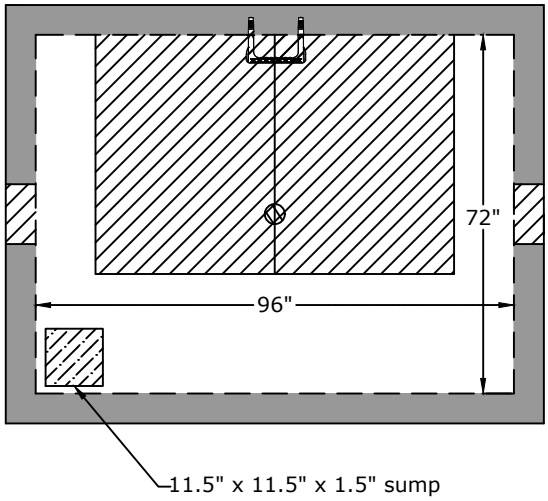


## Notes

Top weight - 8,800 lb
Bottom weight - 10,900 lb

## Side View

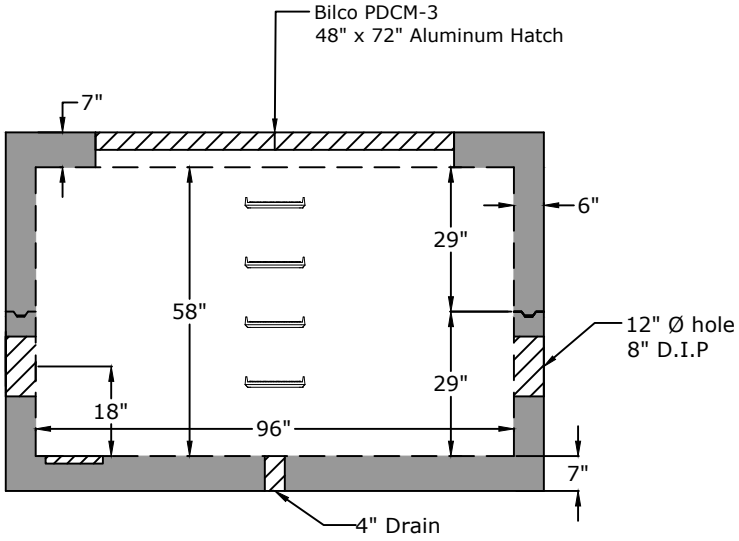


FORTILINE WATERWORKS

### Joint Detail

Positive Lock Male/Female Keyway
+- 0.005" tolerance



**Approved for Production**

**Project:** _____ **Date:** _____

**Quantity:** _____ **By:** _____

**Drawn by:** Scott Lee | **Date:** 10.272026

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

**Concrete:** 5,000 psi minimum strength (28 day)
**Reinforcing:** Primary reinforcement will be rebar (Grade 60) rebar.
**Pipe Penetrations:** All pipe penetrations are placed according to job requirements.
**Sealant:** Sealant used will meet or exceed ASTM C990.
**Steps:** If required, will be aligned under the hatch unless specified.
**General:** Meter vaults are not water tight structures unless specified by Barger Precast.

**Tank Warranty:** See Terms and Conditions.

# 8' x 6' x 58" - 8" Fire Service Backflow Preventor
# City of Brentwood Water Services Detail