Top View

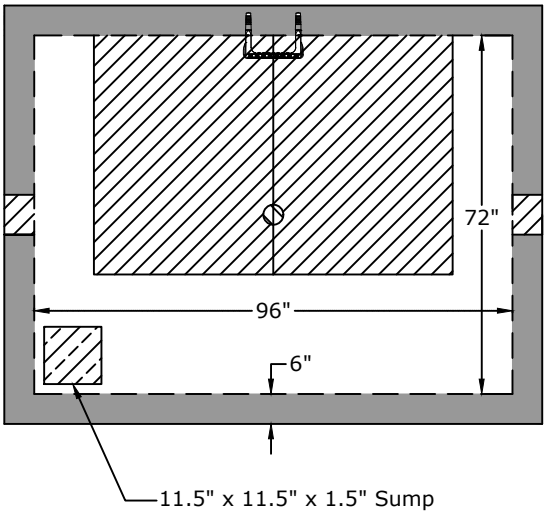

Notes

Top weight - 8,800 lb
Bobottom weight - 10,900 lb

Side View

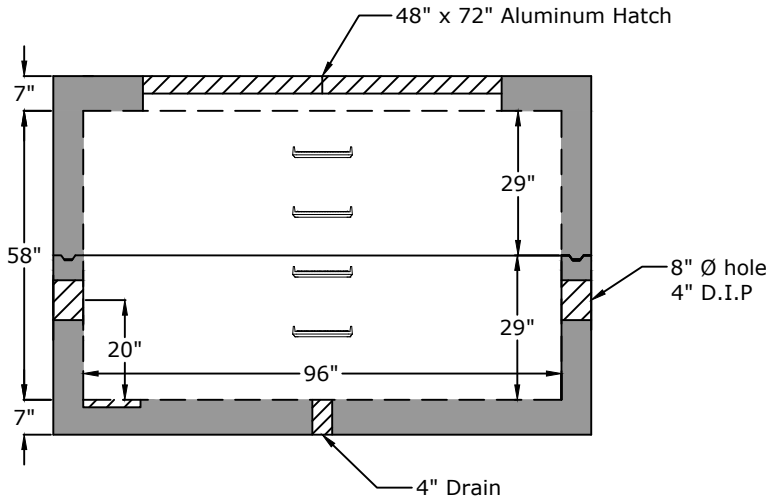

Joint Detail

Positive Lock Male/Female Keyway
+- 0.005" tolerance



Approved for Production

Project: _____ **Date:** _____

Quantity: _____ **By:** _____

Drawn by: Scott Lee | **Date:** 10.272026

Concrete: 5,000 psi minimum strength (28 day)
Reinforcing: Primary reinforcement will be rebar (Grade 60) rebar.
Pipe Penetrations: All pipe penetrations are placed according to job requirements.
Sealant: Sealant used will meet or exceed ASTM C990.
Steps: If required, will be aligned under the hatch unless specified.
General: Meter vaults are not water tight structures unless specified by Barger Precast.

Tank Warranty: See Terms and Conditions.

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

8' x 6' x 58" - 4" Meter Vault - Octave
Smyrna Utility District