



## **End View**


## Top View

#### Notes:

HS20 Traffic Rated 4" - 6" Multi Boot (Standard) 2/3 - 1/3 Compartment Capacity



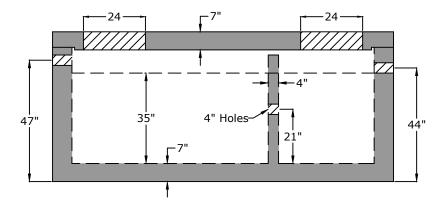



Side View

# **Baffle View**

### **Specifications**

Concrete: 5,000 psi minimum strength (28 day)
Reinforcing: Primary reinforcement will be rebar.
Risers: Grade rings and manhole frames and covers sold separately.
Sealant: Sealant used in the seam of the tank will meet or exceed ASTM C990.
Pipe Penetrations: Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.

Partition Wall: The partition wall, if present, is poured monolithically. Drawing: All measurements are accurate within  $\pm\ 1$  inch.

Tank Warranty: See Terms & Conditions.

Centroid(s): Lid (66, 36), Base (66, 36)

#### Weights

Top - 5,133 lb Bottom - 17,202 lb

Date: 5.102010

**Anti-Float Protection** 

0" of water

**Installation:** The tank hole is not to be more than 18 in. longer and wider than the tank. There shall be a minimum of 6" of 3/4" stone bedding. This tank is designed for HS20 traffic loads and with a max backfill cover of 8' and a minimum of 6"

# 1,000 Gallon HS20 Septic Tank

P.O. Box 370 - Kingston TN 37763 Phone 888.882.5860 - BargerPrecastcom

Drawn By: Eric Barger

Updated:

7,292025