
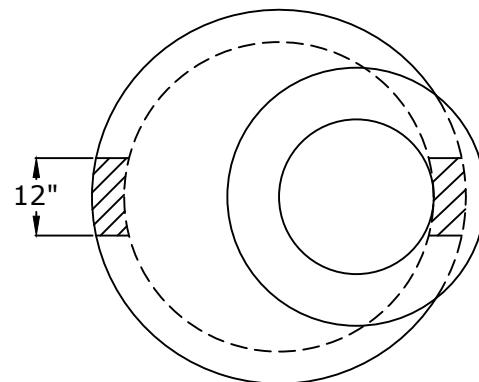


Eccentric Cone

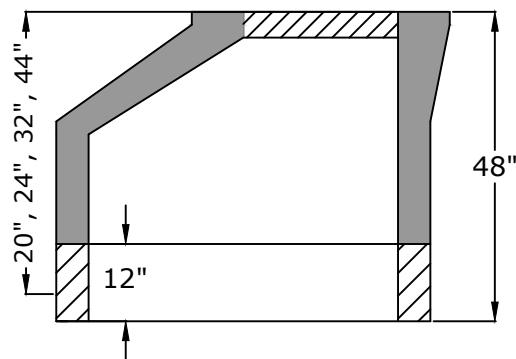

<u>Eccentric Cone</u>
20" - 1,700 lb.
24" - 2,000 lb.
32" - 2,600 lb.
44" - 3,450 lb.

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Drawn by: Eric Barger Date: 9.11.2025

Specifications

Concrete: 4,500 psi minimum 28 day compressive strength
Reinforcing: Per ASTM C478 with design calculations performed by a Licensed P.E. Minimum 2" cover of all reinforcing steel.

Pipe Penetrations: All pipe penetrations are placed according to job requirements.

Pipe Seals: All pipe boots will meet ASTM C990.

Sealant: Sealant used will meet ASTM C923.

Steps: On 16" centers unless otherwise specified.

Preformed Invert: As required by plans or governing specifications.

BARGER PRECAST

P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerPrecast.com

**48" ID Air Release Cone
(Doghouse - Straight)**