



Top View

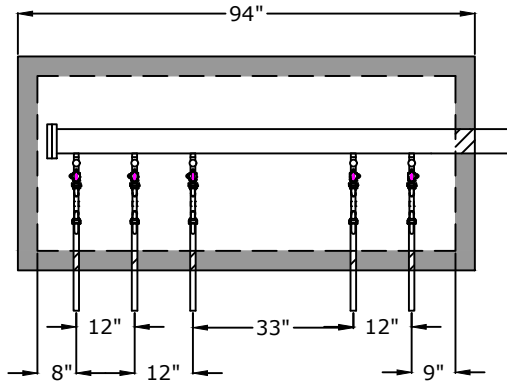


1. (1) 3" PEXPE 9'00 Spool Piece
2. (1) 3" MJ Cap
3. (1) 3" Restraint
4. (6) 3" x $\frac{3}{4}$ " NPT Saddles
5. (6) $\frac{3}{4}$ " x 4" Brass Nipple
6. (6) AYM34583476101MW Ball Valve FIP x MSN
7. (6) $\frac{3}{4}$ " Meter Idler
8. Meter & MXU Supplied by Metro
9. (6) AYM34583476110MWQ Ball Valve QJC X MSN
10. Halliday S2R084035CD 35" X 84" Access Cover

Side View

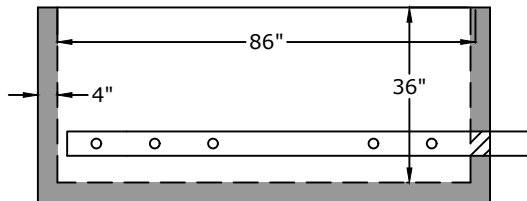

End View



Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

BARGER PRECAST

C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerAndSons.com

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Pipe Penetrations: All pipe penetrations are placed according to job requirements.

Pipe Stands: Adjustable height pipe stands can be provided to support assembly.

Sealant: Sealant used will meet or exceed ASTM C990.

86" x 36" x 36"

5 Gang Meter Vault - Nashville Metro - Right

Date: 9.252025

Drawn By: Samantha Lowe

Approx. Vault Weight: 4,600 lbs.